

# BIOSECURITY

WHERE  
HEALTH  
BEGINS

## <sup>TM</sup> Kenosan

UNLEASH THE POWER OF CLEANING!

- Sticky and long-lasting foam
- Very cost-effective use
- Extreme dirt penetrating capacity



**CID LINES**  
An Ecolab Company

# Kenosan<sup>TM</sup>

UNLEASH THE POWER OF CLEANING!

## Kenosan<sup>TM</sup> combines a strong adhesion power with a penetrating cleaning action!

The high-level formulation guarantees a unique cleaning result in the most heavy-duty circumstances in pig, poultry and dairy houses. Even the most thick and dried up dirt (manure, litter, etc.) like in farrowing crates, fattening pens, turkey or broiler rearing houses, milking parlours etc. stand no chance against the penetrating and dissolving power of Kenosan.

The cleaning action also gets amplified by extended contact time due to the sticky foam that remains attached upon all types of surfaces. Because the revolutionary sticky foam ensures a long contact time it therefore results in saving money on labour, water and energy.

## Safety on equipment

Kenosan has been tested on different types of surfaces and proves to be non corrosive. Kenosan<sup>TM</sup> guarantees you a life time warranty on your equipment!

Type of metal/surface	corrosion speed value at 1000hrs *10 <sup>3</sup> g metal ingredient per cm <sup>2</sup> hour	corrosion (mm/year)
Stainless steel 316	0,005	0,00005
Copper surface	0,035	0,00046
Brass surface	0,046	0,00046
Anodized Aluminium	0,130	0,03176
Crude Aluminium 7000 (Al Mg alloy)	0,054	0,149
Galvanized iron	0,008	0,00016
Corrosion if	> 1	> 0,7

\*dilution: 1%, contact time: 300 hours



# CLEANING OPEN PLACE




## Dirt dissolving power at very low dilution

Kenosan does exactly what you expect:

- creating a long lasting foam that sticks on various materials
- profound cleaning in the most challenging circumstances
- performs these actions at already low dilutions: 0,5 - 2%

This extraordinary performance at such low dilution is unseen among alkaline foam cleaners and thus makes it also cost effective per cleaned m<sup>2</sup>. Using Kenosan can save up to 50% of product per m<sup>2</sup>.

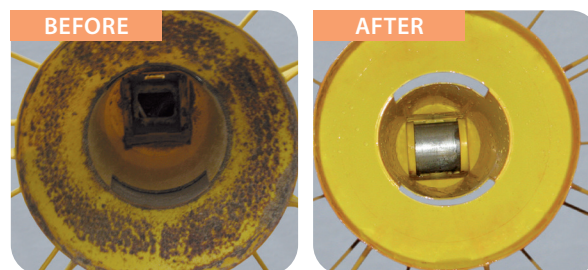

## Application

1. remove dirt
2. apply Kenosan<sup>TM</sup> with a foaming lance with cold water
3. dilution 0,5 - 2% (5-20 ml/L)
4. contact time: 10 - 60 minutes
5. rinse with high or low pressure

Before any use, read the label and the information concerning the product. This product is not necessarily available or registered in every country. Check the registration number in your country.

Waterpoortstraat 2, 8900 Ieper · Belgium · T +32 57 21 78 77  
F +32 57 21 78 79 · info@cidlines.com · [www.cidlines.com](http://www.cidlines.com)